



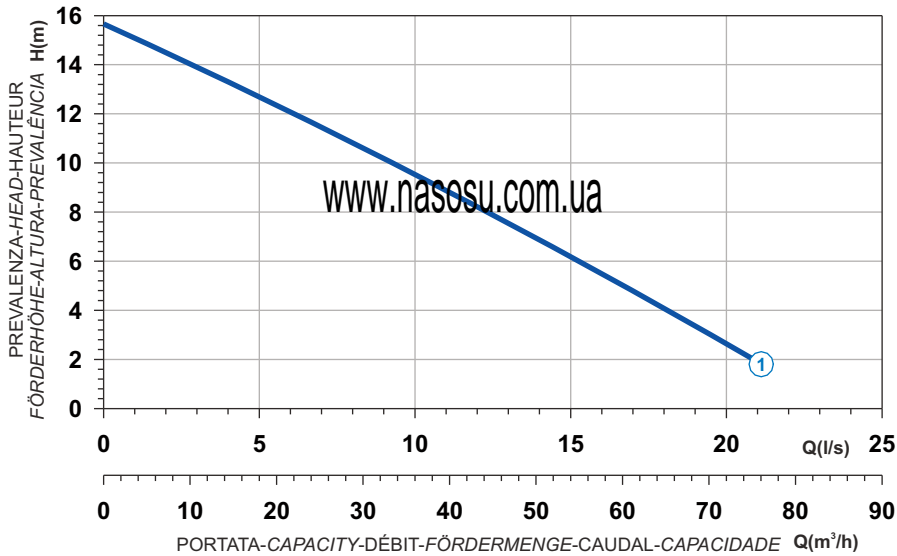

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
 Kennlinie - Curva característica - Curva característica



Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7005698	G210R6V2-L65AA2	4,1	8,5	50,1	7000840

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	65
Discharge (mm)	DN 65
Weight (Kg)	77