




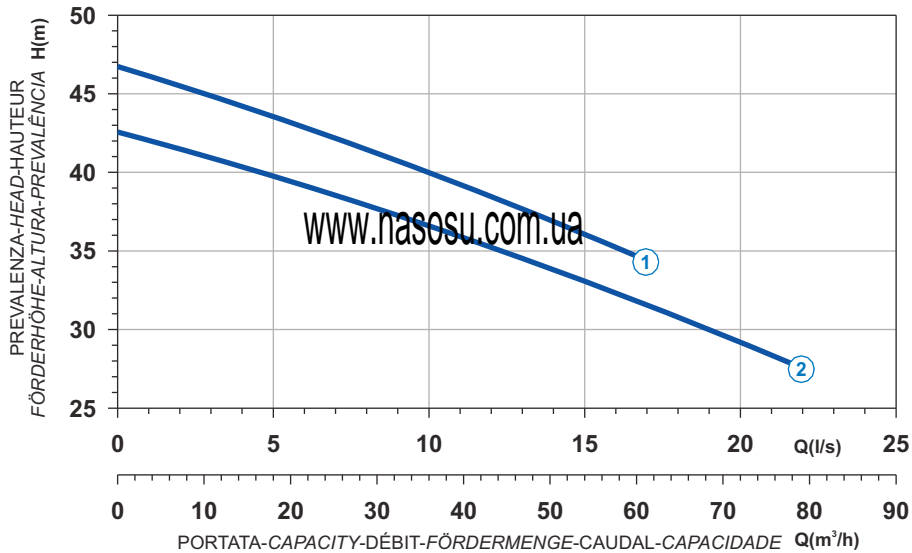

 Ghisa EN-GJL-250  
 Fonte EN-GJL-250  
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250  
 Grauguss EN-GJL-250  
 Ferro fundido EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique  
 Kennlinie - Curva característica - Curva característica**



Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7006428	G213R6V1-M50AA2	18,2	34	194	7007469
2	7006429	G213R6V2-M50AA2	18,2	34	194	7007398

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	50
Discharge (mm)	DN 80
Weight (Kg)	191