





	Ghisa EN-GJL-250		Cast Iron EN-GJL-250
	Fonte EN-GJL-250		Grauguss EN-GJL-250
	Hierro fundido EN-GJL-250		Ferro fundido EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica**

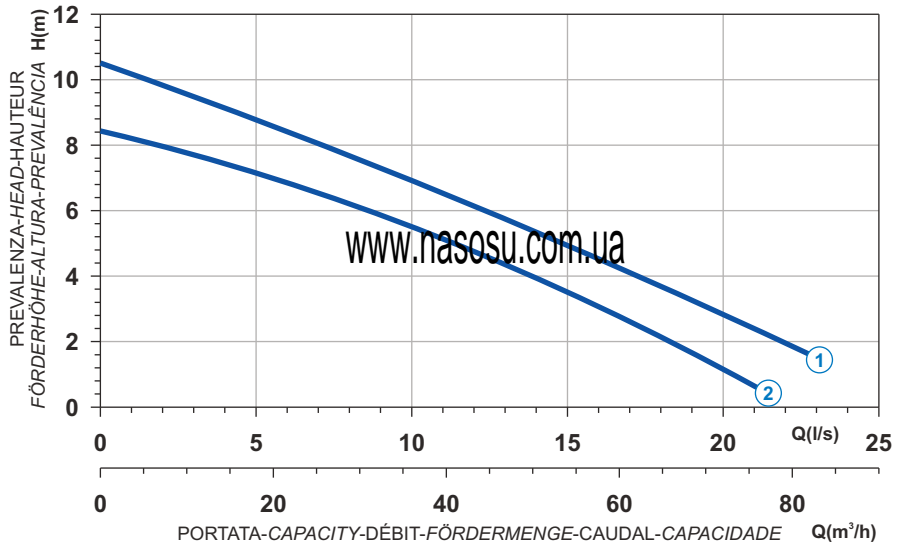

Power supply	3ph 400V 50Hz
R.P.M.	1450
Free passage (mm)	60
Discharge (mm)	DN 80
Weight (Kg)	64

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7007382	G409T6V1-M60AA0	2,8	6,5	29,2	7007625
2	7007383	G409T6V2-M60AA0	2,3	5,0	22,5	7000848