




- Ghisa EN-GJL-250
- Cast Iron EN-GJL-250
- Fonte EN-GJL-250
- Grauguss EN-GJL-250
- Hierro fundido EN-GJL-250
- Ferro fundido EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica**

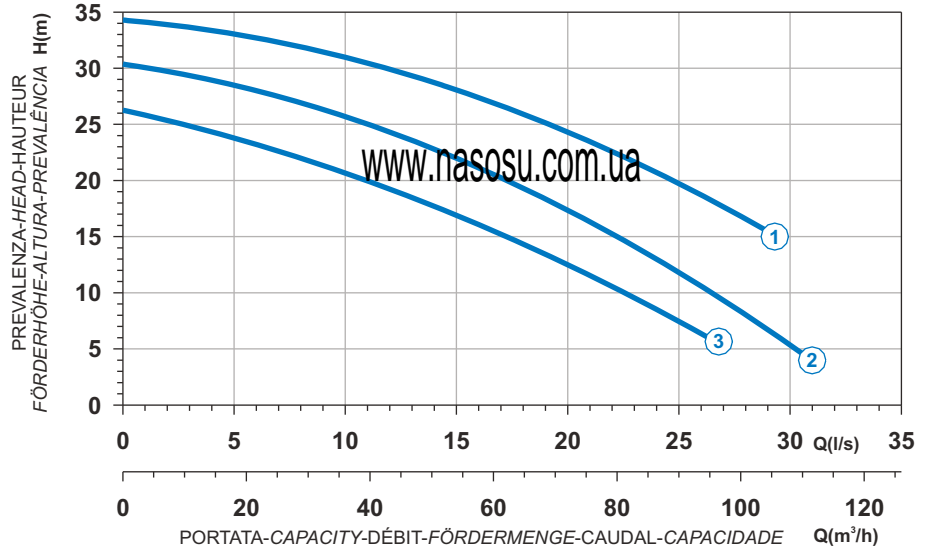

| | |
|-------------------|-------------------|
| Power supply | 3ph 400/690V 50Hz |
| R.P.M. | 2850 |
| Free passage (mm) | 35 |
| Discharge (mm) | DN 80 |
| Weight (Kg) | 191 |

| Curve N° | Code | Type | MOTOR | | | ATEX code |
|----------|---------|-----------------|-----------------------|-----------------------|-------------------------|-----------|
| | | | Nominal power P2 (kW) | Nominal current I (A) | Starting current Is (A) | |
| 1 | 7009200 | G213R3S1-M35AA2 | 15,9 | 30,0 | 171 | - |
| 2 | 7001559 | G213R3S2-M35AA2 | 14,7 | 26,8 | 153 | - |
| 3 | 7003523 | G213R3S3-M35AA2 | 14,7 | 26,8 | 153 | - |