




- Ghisa EN-GJL-250**
- Cast Iron EN-GJL-250**
- Fonte EN-GJL-250**
- Grauguss EN-GJL-250**
- Hierro fundido EN-GJL-250**
- Ferro fundido EN-GJL-250**

**Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica**

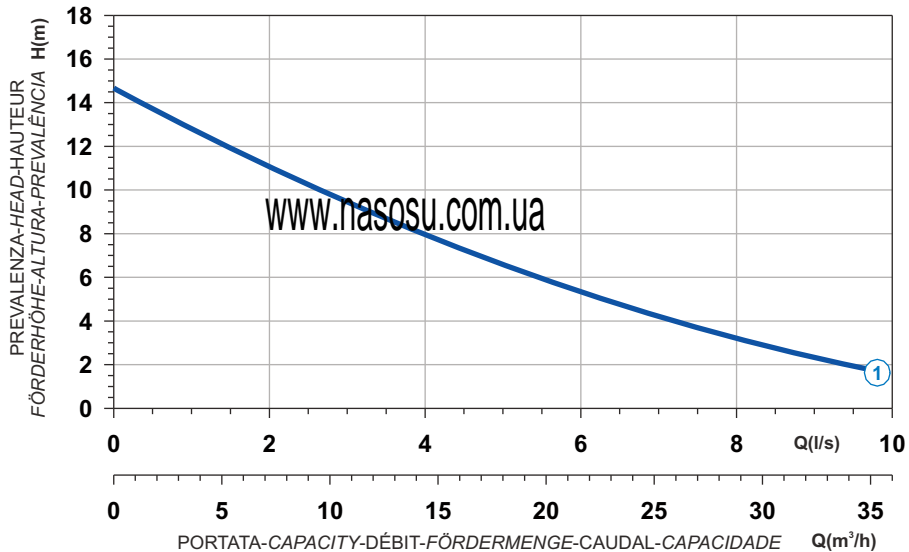

Power supply	1ph 230V 50Hz
R.P.M.	2850
Free passage (mm)	30
Discharge (mm)	DN 50
Weight (Kg)	31

Curve N°	Code	Type	MOTOR			ATEX code
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7000394	G272M1M2-K30AB1	1,1	7,5	21	-